



# DOWN LIGHT

Indoor Light | Downlight



## Recessed Downlight

### ELX-MRAC38-H5W



3.000K   4.000K   5.000K   6.000K


## ■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Material
5W <i>Optional (6W)</i>	AC100-240V	50/60Hz	90Lm/W	480Lm	>90Ra	3000K/6000K	IP20	15°/24°	Aluminium Alloy


Model : ELX-MRAC38-H5W



Dimension ( mm )

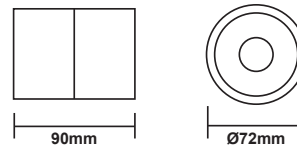

## Application

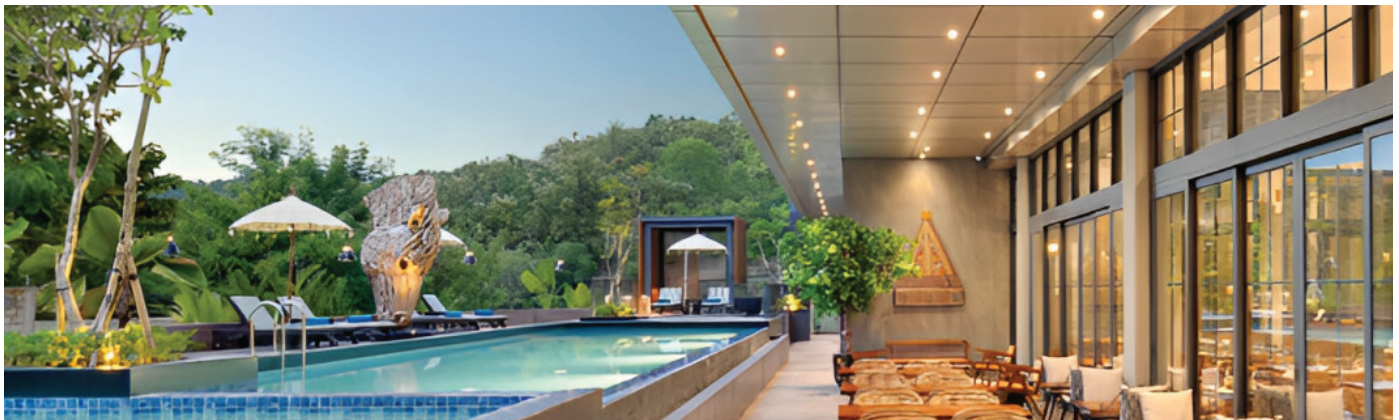

- \* Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

