



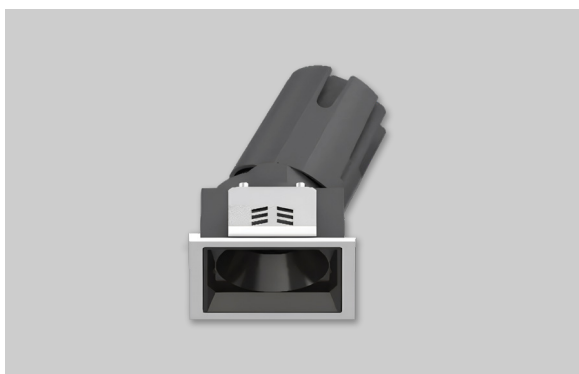

3.000K 4.000K 5.000K 6.000K

ZERON
NEW LIGHT NEW LIFE

Recessed Downlight ZERN-J02FSS




■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Material
7W	AC100-240V	50/60Hz	110Lm/W	770Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium
10W	AC100-240V	50/60Hz	110Lm/W	1.100Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium
12W	AC100-240V	50/60Hz	110Lm/W	1.320Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium
18W	AC100-240V	50/60Hz	110Lm/W	1.980Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium
20W	AC100-240V	50/60Hz	110Lm/W	2.200Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium
30W	AC100-240V	50/60Hz	110Lm/W	3.300Lm	>80Ra Optional (>90Ra, >95Ra)	3000K/4000K/6000K	IP65	15°/24°/38°/60°	Die Casting Aluminium

Model : ZERN-J02FSS-7W*1




Dimension (mm)



Model : ZERN-J02FSS-18W*1




Dimension (mm)



Model : ZERN-J02FSS-10W*1




Dimension (mm)



Model : ZERN-J02FSS-20W*1




Dimension (mm)



Model : ZERN-J02FSS-12W*1




Dimension (mm)



Model : ZERN-J02FSS-30W*1



Dimension (mm)



* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°