




DOWN LIGHT

Indoor Light | Downlight



Recessed Downlight ELX-W02-SDR/SDS

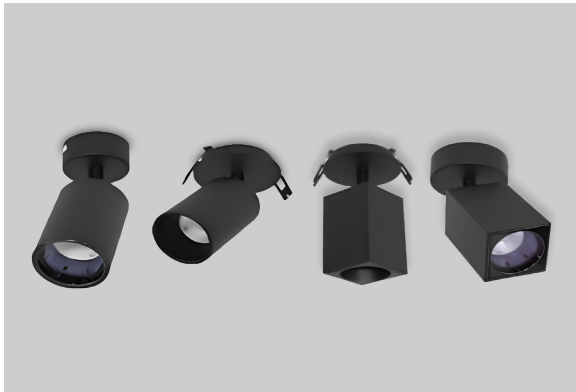

3.000K 4.000K 5.000K 6.000K

■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Material
10W	AC100-240V	50/60Hz	90Lm/W	900Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/5000K/6000K	IP20	3°/5°/15°/24°/36°	Die Casting Aluminium
20W	AC100-240V	50/60Hz	90Lm/W	1.800Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/5000K/6000K	IP20	3°/5°/15°/24°/36°	Die Casting Aluminium
25W	AC100-240V	50/60Hz	90Lm/W	2.250Lm	>80Ra <i>Optional (>90Ra, >95Ra)</i>	3000K/4000K/5000K/6000K	IP20	3°/5°/15°/24°/36°	Die Casting Aluminium

Model : ELX-SDR-10W



Dimension (mm)



Model : ELX-SDS-10W



Dimension (mm)



Model : ELX-SDR-20W




Dimension (mm)



Model : ELX-SDS-20W



Dimension (mm)



Model : ELX-SDR-25W



Dimension (mm)



Model : ELX-SDS-25W



Dimension (mm)



Optional Application



* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

