



## MR16 Ecoluxon

### ELX-MRAC38 / MRDC38

- 3.000K
- 4.000K
- 5.000K
- 6.000K


## ■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Beam Angle	Berat	Material
5W	DC 12V, AC 100-240V	50/60Hz	85lm/W	425lm	>80Ra	3000K/6000K	38°	58.5gr, 29gr	Aluminium Alloy


Model : ELX-MRAC38-5W  
ELX-MRDC38-5W




Dimension (mm)

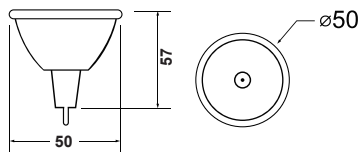

Light Distribution Curve



## Application

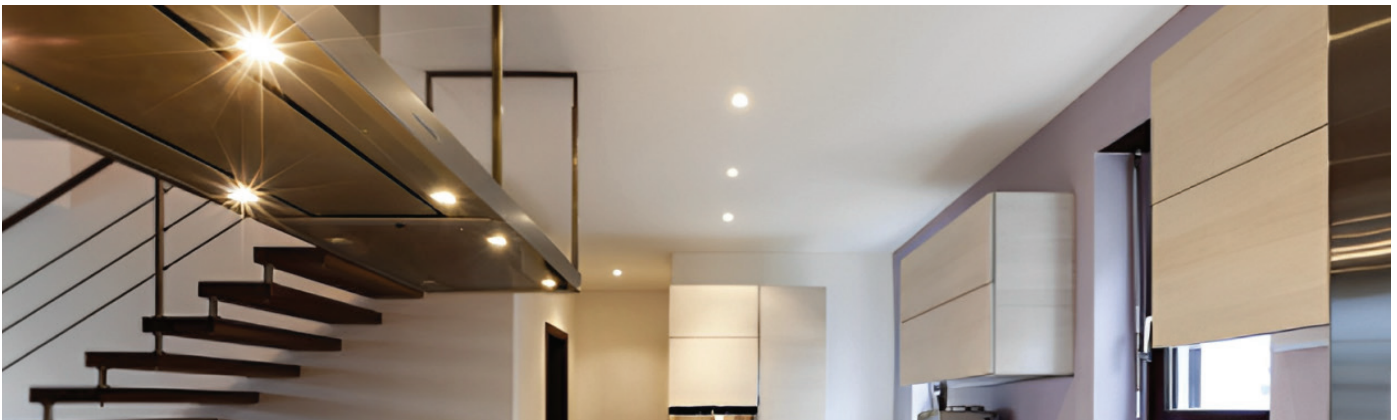

- \* Easy maintenance
  - Modular LED for easy replacement
  - Opening and closing possible of LED module part and power supply part
  - Customizable beam angle
  - Temperature max 50°

